

AD-A079 564

AIR FORCE PACKAGING EVALUATION AGENCY WRIGHT-PATTERSON--ETC F/G 13/4  
PACKAGING AND SHIPPING ANALYSIS OF THE ASN-129 AHRS DISPLACEMENT--ETC(U)  
NOV 79 F C JARVIS  
PTPT-79-18

UNCLASSIFIED

| OF |  
AD  
A079564



NL

END  
DATE  
FILMED  
2-80  
DDC



Approved for Public Release  
Distribution Unlimited

PTPT ~~Project No.~~ 79-18  
AFPEA Project No. 79-P7-62

LEVEL II

AD A 079564

10

Frank C. Jarvis  
Mechanical Engineering Technician  
Autovon 787-4519  
Commercial (513) 257-4519

6

PACKAGING AND SHIPPING ANALYSIS OF THE  
ASN-129 AHRS DISPLACEMENT GYRO

DDC FILE COPY

12 10

DDC  
RECEIVED  
JAN 18 1980  
A

HQ AFALD/PTP  
Air Force Packaging Evaluation Agency  
Wright-Patterson AFB OH 45433

11 29 Nov 1979

403 519

80 1 14 035

mit

# NOTICE

When government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related government procurement operation, the United States Government thereby incurs no responsibility whatsoever; and the fact that the government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto. This report is not to be used in whole or in part for advertising or sales purposes.

## ABSTRACT

The packaging and shipping analysis of the ASN-129 AHRS Displacement Gyro (A-10 aircraft) revealed that the Transportation Packaging Order pack (TPO 01-021-3681) will not provide the 15 to 20 G shock protection level recommended for this gyro. Field tests confirmed the results of the in-house study.

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DOC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or special
A	

PREPARED BY:

*Frank C. Jarvis*  
FRANK C. JARVIS, Mechanical Engineering  
Technician, Materials Engineering Div.  
AF Packaging Evaluation Agency

PUBLICATION DATE:

29 NOV 1979

REVIEWED BY:

*Matthew A. Venetos*  
MATTHEW A. VENETOS  
Chief, Materials Engineering Division  
Air Force Packaging Evaluation Agency

APPROVED BY:

*Jack E. Thompson*  
JACK E. THOMPSON  
Director, Air Force Packaging  
Evaluation Agency

80 1 14 035

## TABLE OF CONTENTS

	PAGE
Abstract .....	1
Introduction .....	1
Description of Test Pack .....	1
Instrumentation and Equipment .....	2
Test Procedures and Results .....	2-4
Discussion .....	4
Conclusions .....	4
Recommendations .....	4
Distribution List .....	5-6
Form DD 1473 .....	7

## FIGURES

Figure 1. Photographs of Test Pack .....	1
Figure 2. Photograph of Simulated Gyro Test Load .	2

## TABLES

Table I. Drop Test Data .....	3
Table II. Field Test Data .....	3

## INTRODUCTION

Oklahoma City Air Logistics Center (OC-ALC/DSPA) requested a field test of the A-10 AHRS Displacement Gyro because some of the gyros failed the initial checkout at field level. In-house tests were conducted to supplement the field test data.

## DESCRIPTION OF TEST PACK

The single wall fiberboard outer container included an inner "Fast Pack" (star) container and 2 x 2 inch thick polyurethane(ester) corner pad inserts. The pack dimensions are 16½ L x 16½ W x 23 H inches and it has a gross weight of 23 pounds. The test pack is shown in Figure 1.

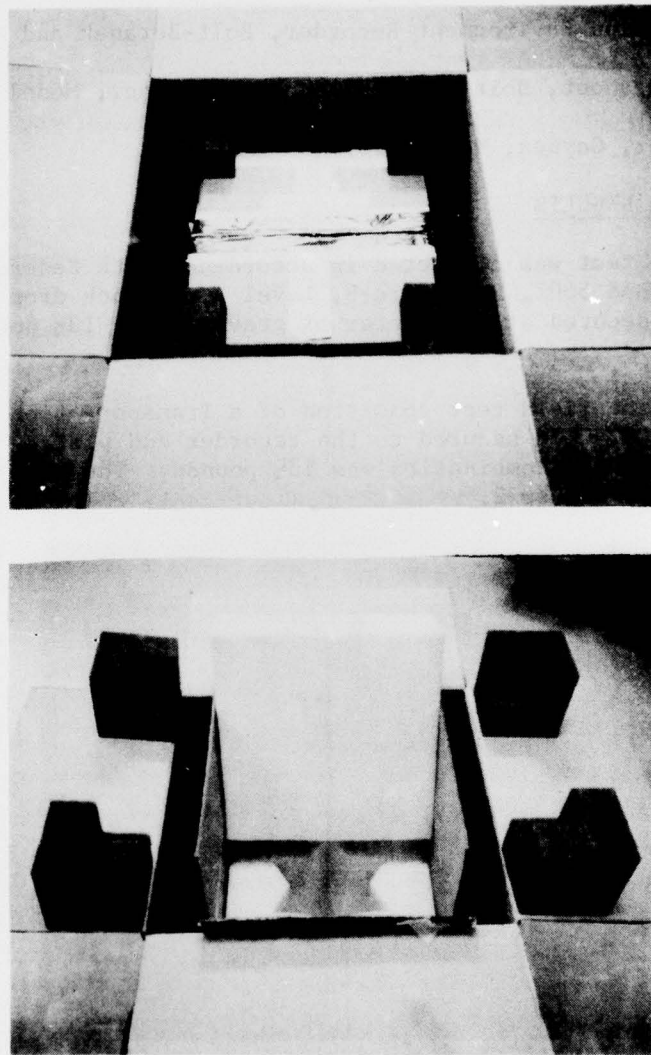


Figure 1. Test Pack

The inner Fast-Pack carton dimensions are 12 x 12 x 18 inches.

## INSTRUMENTATION AND EQUIPMENT

The following instrumentation and equipment were employed for this evaluation:

1. Oscilloscope, Tektronic, 4 channel storage, Model 565B.
2. Accelerometer, tri-axial, Endevco, Model 2233E.
3. Amplifiers (3 ea), Endevco, Model 2424C.
4. Power Supply, Endevco, Model 2622C.
5. Transportation Environment Recorder, Bolt-Beranek and Newman, Model 714.
6. Recorder Readout, Bolt-Beranck and Newman, Inc., Model 615.
7. Drop Tester, Gaynes, Model 125.

## TEST PROCEDURE AND RESULTS

The free fall drop test was conducted in accordance with Federal Test Method Standard 101B, Method 5007, Procedure B, Level A, 30-inch drop height. A tri-axial accelerometer was secured at the center of gravity of a 13½ pound simulated gyro test load.

The test load for the field test consisted of a Transportation Environment Recorder with two pieces of plywood secured to the recorder end plates. The weight for the recorder and plywood combination was 13½ pounds. The test loads are shown in the photograph of Figure 2.

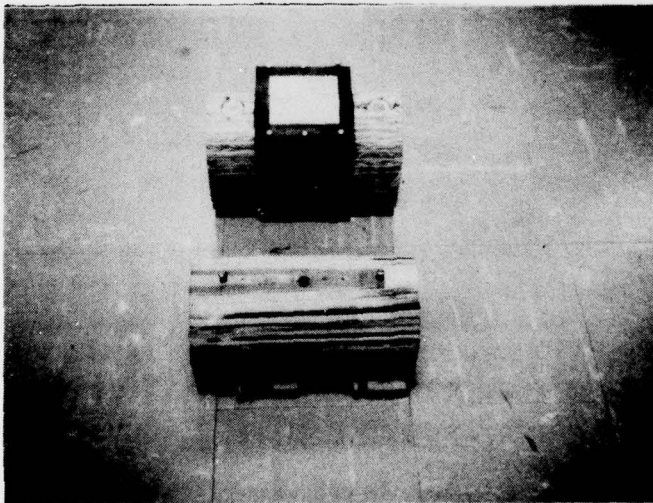


Figure 2. Simulated Gyro Test Loads

The results of the drop tests are listed in Table I and the field test results are presented in Table II. Two series of drop tests were conducted because the

test load rotated within the star pack cavity and positioned itself where the edge of the test load base was adjacent to the thin portion of the star pack cushioning material. This produced the higher shock levels generated during the second drop test series.

IMPACT SURFACE	PEAK ACCELERATION (G)									
	TEST NR. 1					TEST NR 2				
	X	Y	Z	R	Duration Ms	X	Y	Z	R	Duration Ms
3 (BOT)	15	2	5	15.9	60	16	4	0	16.4	70
1 (TOP)	12	2	0	12.2	25	10	0	3	10.4	75
2 (FRONT)	0	2	18	18.1	60	10	44	25	51.6	70
4 (BACK)	2	2	17	17.2	65	2	17	9	19.3	70
5 (L. END)	4	30	8	31.3	70	10	28	42	51.5	45
6 (R. END)	5	21	2	21.7	65	8	12	26	29.7	70
AV. 19.4					AV. 29.8					

TABLE I. DROP TEST DATA

SHOCK LEVEL RANGE (G)	NUMBER OF SHOCKS RECORDED			
	X	Y	Z	R
2.5-5.0	33	26	46	68
5.0-7.5	8	1	6	21
7.5-10.0	2	3	4	6
10.0-12.5	0	1	1	6
12.5-15.0	0	0	0	2
15.0-17.5	0	0	0	1
17.5-20.0	0	0	0	0
20.0-22.5	0	1	0	0
22.5-25.0	0	0	0	1
TRIP DURATION: 12.9 DAYS				

TABLE II. FIELD TEST DATA

While awaiting the return of the test pack from the field trip, a second test pack was fabricated in the AFPEA shop in accordance with the TPO specifications. The results were similar to the original TPO pack. The average of the shock levels was 25.4 Gs for the first drop test series and 23.9 Gs for the second drop test series.

#### DISCUSSION

In addition to the item rotating within the star pack cavity, another problem occurred when one of the corner pad assemblies became dislodged from the corner resulting in some of the high shock levels recorded during the in-house tests. This Agency's experience with polyurethane corner pads indicates that corner pads with a surface area smaller than 3 x 3 inches will occasionally allow the inner carton to slip between the pad assemblies.

The vertical positioning of the item in the star pack cavity also allowed a "grip effect" to hold the item near the bottom of the cavity, after the initial impact, which reduced the effectiveness of the bottom cushion in subsequent drops. If this gyro and similar gyros are packaged in a horizontal position, the smaller vertical surface area will reduce the "grip effect".

#### CONCLUSIONS

The combination Fast-Pack and 2 x 2 corner pad assemblies will not adequately protect this gyro during rough handling situations.

#### RECOMMENDATIONS

1. Eliminate the inner Fast-Pack and redesign the complete pack.
2. Consider using the Navy's low fragility shipping container (LFSC), ASO P/N 15024-200.

DISTRIBUTION LIST

HQ USAF/LETN Wash DC 20330	1
AGMC/SNA Newark AFS OH 43055	1
Aviation Supply Office Attn: TEP-A Philadelphia PA 19111	1
Commander US Army Natick R&D Ctr/DRXNM-EPS Natick MA 01760	1
NWC-Earle Colts Neck NJ 07722	1
DESC/DESC-T 1507 Wilmington Pike Dayton OH 45444	1
JMPTC Aberdeen Proving Ground MD 21005	2
ADTC/SD3P Eglin AFB FL 32542	1
WR-ALC/DSP Robins AFB GA 31098	1
OO-ALC/DSTC Hill AFB UT 84406	1
OC-ALC/DSPA Tinker AFB OK 73145	2
OC-ALC/MMIMI Tinker AFB OK 73145	1
SA-ALC/DSP Kelly AFB TX 78241	1
SM-ALC/DSP McClellan AFB CA 95652	1
Tobyhanna Army Depot/DRXTO-TP-S Tobyhanna PA 18466	1

DISTRIBUTION LIST (Cont'd)

HQ AFSC/LGT Andrews AFB DC 20334	1
AFALD/PT	1
AFLC/LOTP	1
AFALD/PTP Library	20
DDC-TC (Accessions Division) Alexandria VA 22314	12
DLSIE/DRXMC-D US Army Logistics Management Attn: Mr. Malcolm Alley Fort Lee VA 23801	2
AGMC/DMTP Newark AFS OH 43055	1
USA Natick Labs (DRDNA-EPS) Natick MA 01760	1
NAVSUPSYSCMD (SUP-0321A) Wash DC 20376	5
USA Armament Research & Development Command Attn: DRDAR-LCU-TP Dover NJ 07801	1

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER PTPT Report No. 79-18	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Packaging and Shipping Analysis of the ASN-129 AHRS Displacement Gyro	5. TYPE OF REPORT & PERIOD COVERED	
7. AUTHOR(s) Frank C. Jarvis	6. PERFORMING ORG. REPORT NUMBER AFPEA Project No. 79-P7-62	
9. PERFORMING ORGANIZATION NAME AND ADDRESS AFALD/PTPT Wright-Patterson AFB OH 45433	8. CONTRACT OR GRANT NUMBER(s)	
11. CONTROLLING OFFICE NAME AND ADDRESS AFALD/PTP Wright-Patterson AFB OH 45433	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)	12. REPORT DATE November 1979	
	13. NUMBER OF PAGES 7	
	15. SECURITY CLASS. (of this report) Unclassified	
16. DISTRIBUTION STATEMENT (of this Report) APPROVED FOR PUBLIC RELEASE DISTRIBUTION UNLIMITED		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) A-10 AHRS Gyro, packaging, drop test, field test.		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The packaging and shipping analysis of the ASN-129 AHRS Displacement Gyro (A-10 aircraft) revealed that the Transportation Packaging Order pack (TPO 01-021-3681) will not provide the 15 to 20 G shock protection level recommended for this gyro. Field tests confirmed the results of the in-house study.		

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)